
MELER

ONE APPLICATOR, MULTIPLE FORMATS

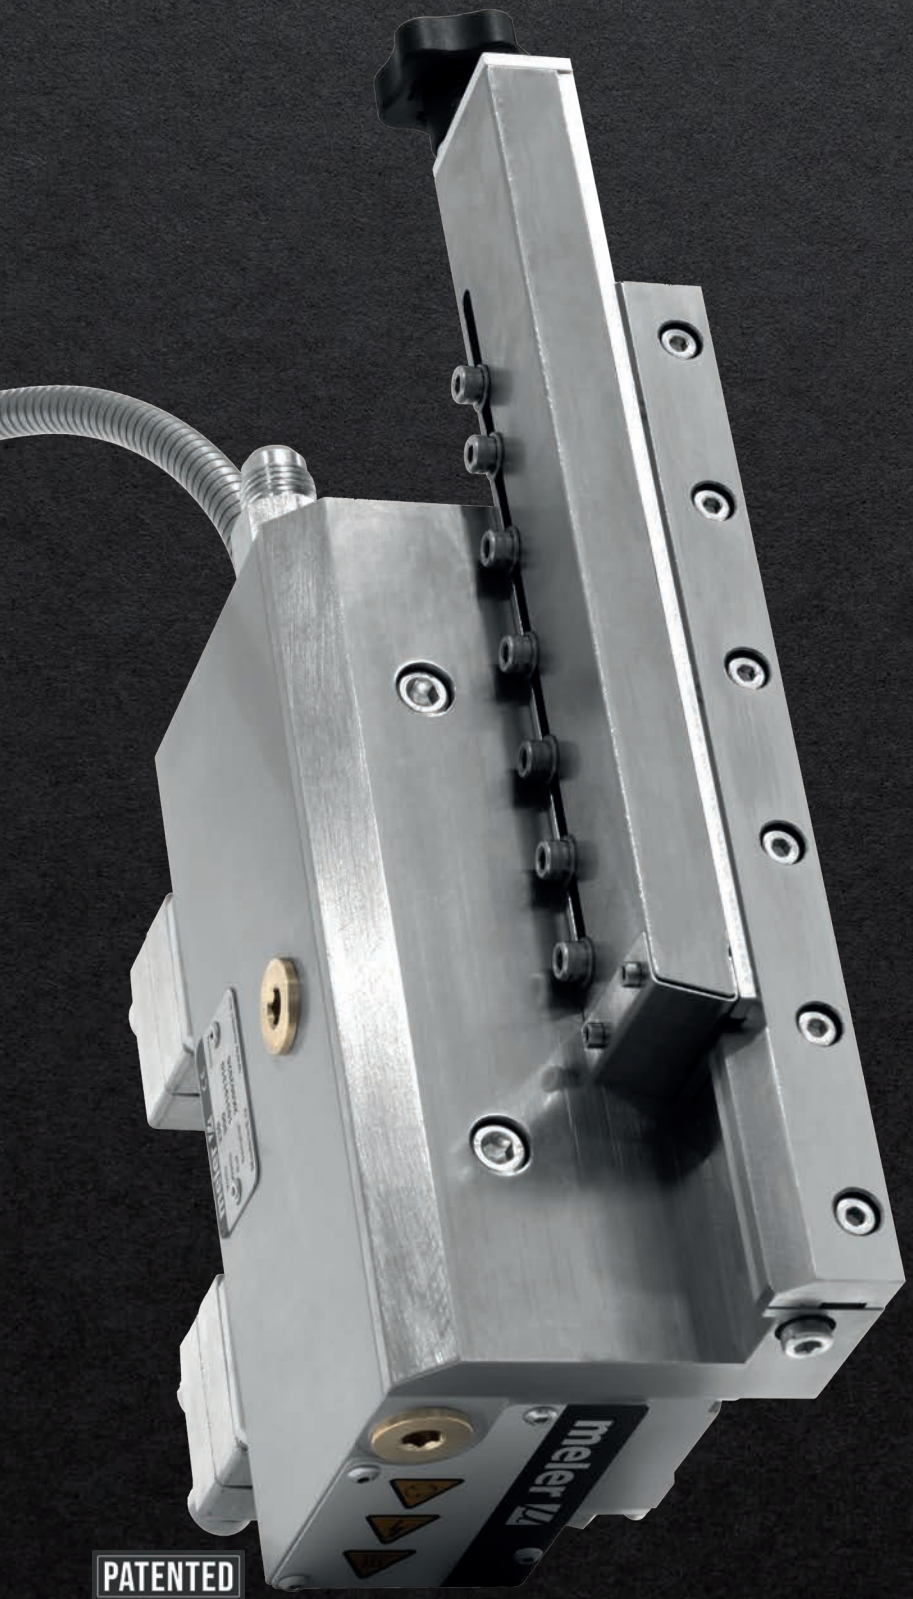

V-LABEL

ADJUSTABLE
LABELLING APPLICATOR

FOR WRAP-AROUND LABELLING OF BOTTLES, TIN, CANS AND OTHER CONTAINERS

MAIN FEATURES

MULTIFORMAT

- Sliding manual adjustment system
- Quick change of the coating width
- 3 models: 0/100 mm - 0/140 mm - 0/270 mm
- Endless patterns


SEAMLESS INTEGRATION

- Compact and simple design
- Fast and accessible format change
- Multiple configuration options
- Suitable for rotating or linear systems


HIGH PERFORMANCE

- High repeatability and speed of application
- High thermal optimisation of the gun body
- Possibility of applying anti-humidity protection


REGULATION SYSTEM

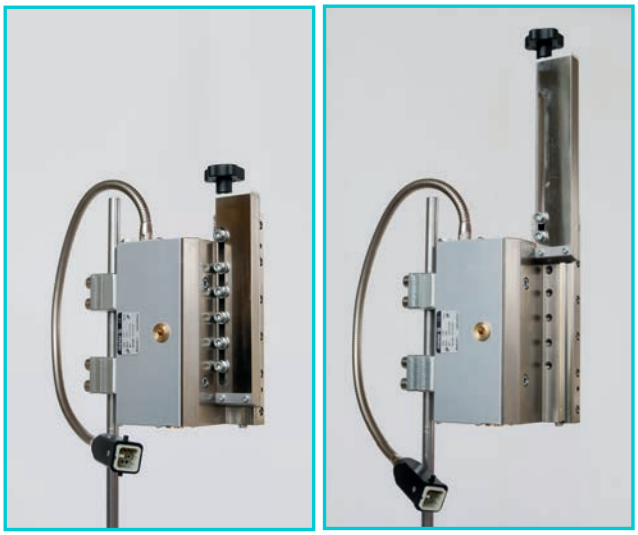

DIMENSIONS

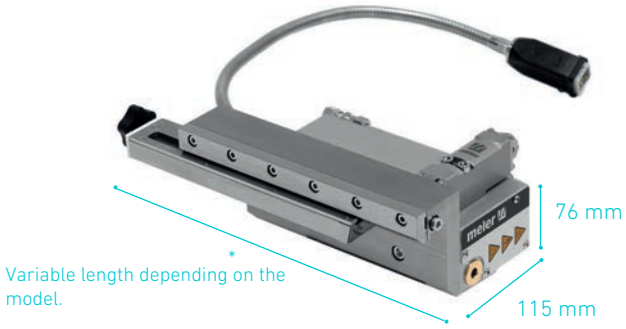

EXAMPLE OF FACILITY

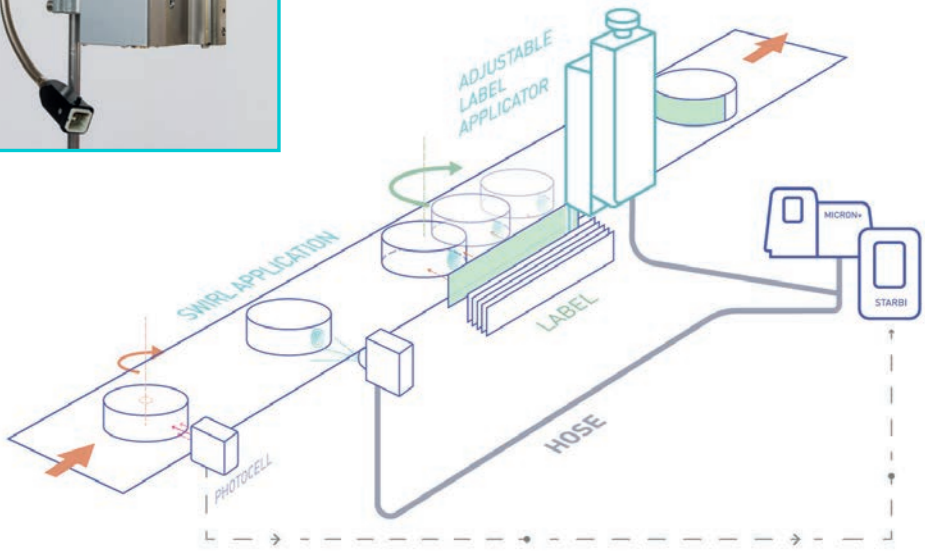

TECHNICAL FEATURES

High application speed	Value depending on solenoid valve, adhesive and coating width..
Maximum label width	0- 100mm / 0 - 140mm / 0-270mm Manual adjustment of the coating width by untightening the screws and sliding the tank lid. Fast positioning by means of support on the labels to be laminated.
Machine position	Left or right side (depending on version)
Laminated strip thickness	Fine adjustment via adjustable module MSU.FL
Maximum adhesive pressure	30 bar
Application control	Solenoid valve 3/2
Maximum pneumatic opening pressure	6 bar. Recommended: 5 bar. Dry, clean, unlubricated air.
Temperature control	Pt100; Ni120 (from melting unit)
Maximum applicator temperature	200°C
Power supply	230 VAC, 50/60 Hz (from melting unit)
Applicator electrical power	100mm version: 700W 140mm version: 900W 270mm version: 1400W
Environmental conditions	Room temperature 0-40°C Relative humidity: 90% RH max. (at 30°C)
Options (on request)	NTC temperature control technology Damp-proof version

C 094- ENG - V0525- Focke Meler reserves the right to modify the contents of this catalogue without notice.